


CP- UNP-3020SL10
2MP Full HD IP PTZ Camera



Main Features

- 1/2.8" CMOS Image sensor
- Powerful 30x Optical and 16x Digital zoom
- DWDR, Day/Night(ICR), Ultra DNR
- Up to 255 Presets, 8 Tour, 5 Pattern, 5 Auto scan
- Max 240°/s pan speed, 360° endless pan rotation
- IR Range of 100 Mtr.
- Built-in 2/1 alarm in/out, IP66
- Mobile Software: iCMOB, gCMOB
- CMS Software: KVMS Pro, vOptimus Pro

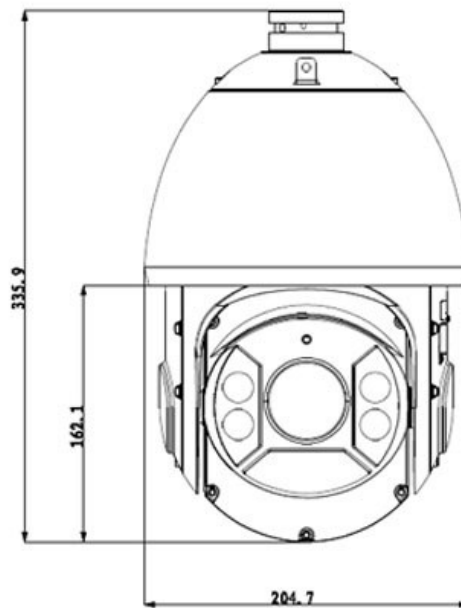

CP- UNP-3020SL10

2MP Full HD IP PTZ Camera

Feature

Image Sensor
 Effective Pixels
 Video Output
 S/N Ratio
 Minimum Illumination
 Focal Length
 Focus Control
 White Balance
 Angle of View
 Close Focus Distance
 Electronic Shutter
 AGC control
 Back Light Compensation
 Optical Zoom
 Digital Zoom
 Pan Travel
 Tilt Travel
 Presets
 Preset Speed
 Privacy Masking
 Special Features
 Power up Action
 Idle Motion
 Time Task
 Day/Night: IR Cut Filter
 Video Compression
 Video Streaming
 Audio Compression
 Audio Streaming
 Protocols

Specification

1/2.8" CMOS
 1944(H) x 1092(V), 2 Megapixels
 BNC(1.0Vp-p/75Ω), PAL / NTSC
 More than 50dB
 Color: 0.05Lux@F1.6, B/W: 0.005Lux@F1.6
 4.3mm~129mm
 Auto / Manual
 Auto, ATW, Indoor, Outdoor, Manual
 H: 65.1° ~ 2.34°
 10mm~ 1500mm
 1/1 ~ 1/30,000s
 Auto / Manual
 BLC / HLC / DWDR
 30x
 16x
 360° endless, Pan Speed: 0.1° ~ 160°/sec
 -15° ~ 90°, Tilt Speed: 0.1° ~ 120°/sec
 255
 Pan: 240° /s; Tilt: 200° /s
 Up to 24 areas
 IR Range upto 100m, Up to 255 Presets, 8 Tour, 5 Pattern, 5 Auto scan
 Auto restore to previous PTZ and lens status after power failure
 Activate Preset/ Pan/ Scan/ Tour/ Pattern if there is no command in the specified period
 Auto activation of Preset/Pan/Scan/Tour/Pattern by preset-time
 Auto(ICR) / Color / B/W
 H.264 / MJPEG
 Main Stream: 25/30fps@1080P/720P, Sub Stream: 25/30fps@D1/CIF
 G.711a / G.711u(32kbps)/ PCM(128kbps)
 1/1 channel In/Out
 IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPoE, DDNS, FTP, IP Filter, QoS, Bonjour, ONVIF Profile S

CP- UNP-3020SL10

2MP Full HD IP PTZ Camera

Feature

Alarm
Max Remote Users
Memory Slot
Operating Temperature
Smart Phone
Weather Proof Standard
Dimension
Weight
Power Source
Power Consumption

Specification

2/1 channel In/Out
20 users
Micro SD, Max 64GB
-40°C ~ 60°C / Less than 90% RH
iPhone, iPad, Android, Windows Phone
IP66
Φ204.7(mm) x 359.9(mm)
7.8kg
AC 24V/2.2A(±10%)
10.5W, 26W (IR on, Heater on)



1141 Budapest, Fogarasi út 77. 1095 Budapest, Mester u. 34.
Tel.: *220-7940, 220-7814, 220-7959, Tel.: *218-5542, 215-9771, 215-7550,
220-8881, 364-3428 Fax: 220-7940 216-7017, 216-7018 Fax: 218-5542
Mobil: 30 531-5454, 30 939-9989 Mobil: 30 940-1970, 20 949-2688

www.cpplus.hu

E-mail: info@delton.hu Web: www.delton.hu

